


## PROTECTIVE WALL

**UGS** 

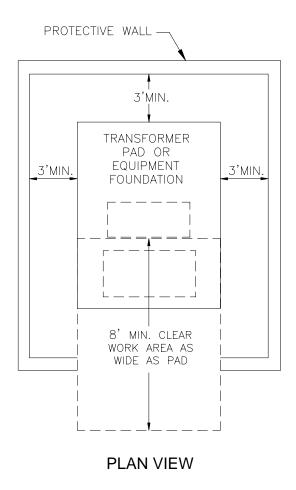

NOTES: \*

- 1. Wall may be constructed of any suitable non-combustible material that is aesthetically compatible with the surrounding area and conforms to City of Riverside Public Works Department Specifications.
- 2. Wall to be 4' min. height when used to protect equipment or transformer from vehicular traffic. Wall to be 6" above adjacent grade and stepped to conform to surrounding grade when used for protection from embankments.
- 3. Provide minimum clearances as shown. Please refer to UGS 295 for further clearance information. A gate is optional but must provide minimum clearances when open.

Rev: 1